

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.


**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01D 5/34, 5/38	A1	(11) International Publication Number: WO 97/16704 (43) International Publication Date: 9 May 1997 (09.05.97)
(21) International Application Number: PCT/GB96/02699 (22) International Filing Date: 4 November 1996 (04.11.96) (30) Priority Data: 9522491.1 2 November 1995 (02.11.95) GB (71) Applicant (for all designated States except US): RENISHAW PLC [GB/GB]; New Mills, Wotton-Under-Edge, Gloucestershire GL12 8JR (GB) (72) Inventors; and (75) Inventors/Applicants (for US only): WRIGHT, David, Allan [GB/GB]; 11 Carnethy Avenue, Edinburgh EH13 0DL (GB). McFARLAND, Geoff [GB/GB]; 77/2 Gilmore Place, Edinburgh EH3 9NU (GB). (74) Agent: JONES, Bruce, Graeme, Roland; Renishaw plc, Patent Dept., New Mills, Wotton-Under-Edge, Gloucestershire GL12 8JR (GB).		(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: OPTO-ELECTRONIC ROTARY ENCODER

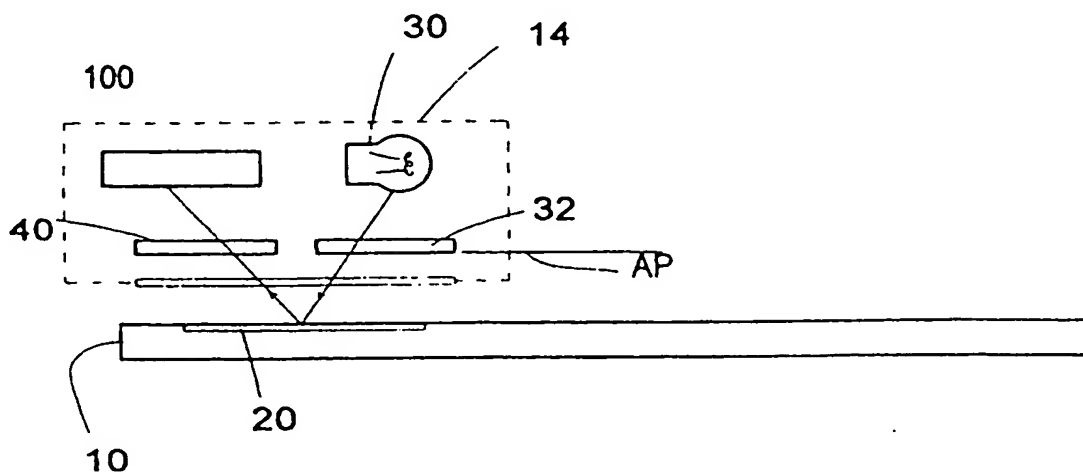

(57) Abstract

A rotary encoder has a scale (22) which rotates relative to a pair of readheads (14). Each of the readheads projects light onto the scale and generates an analyser grating (40), a periodic light pattern, such as interference fringes. The interference fringes and the analyser grating interact to produce a series of resultant Vernier fringes which are incident upon a structure detector array (100). In one embodiment the analyser grating is configured to interact with the angularly extending interference fringes to generate linear resultant fringes. It has been found that phase errors due to eccentric rotation of the scale (22) reduce with decreasing pitch of the resultant fringes.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

OPTO-ELECTRONIC ROTARY ENCODER

The present invention relates to an opto-electronic rotary encoder which may be employed, for example, to measure
5 angular displacement of one rotatable body relative to another.

Such rotary encoders are known per se, and typically include a code wheel, mounted to a first one of the
10 relatively rotatable bodies, having a plurality of radially extending, circumferentially spaced lines, situated at equi-angular intervals about the periphery of the code wheel, thereby to form a scale. An optical readhead, mounted to the other of the relatively rotatable bodies,
15 and in register with the scale, projects light onto the scale which, depending upon the configuration of code wheel, is then either reflected or transmitted. From the reflected or transmitted light, the readhead generates a series of signals which may be used to generate an
20 incremental count indicative of the relative angular displacement of the first and second relatively rotatable bodies.

A first aspect of the present invention provides opto-
25 electronic encoder apparatus for measuring relative movement having a scale defined by a series of spaced apart lines, and a readhead lying in register with the scale, the scale and readhead being relatively movable in the direction of spacing of the lines; the readhead comprising:
30 means for illuminating the scale whereby light passed on by the scale forms a periodic light pattern;
an analyser grating for interacting with said periodic light pattern to generate a resultant fringe pattern; and
a detector upon which said resultant fringe pattern is
35 incident, for generating a plurality of phase shifted cyclically modulating signals upon said relative movement;
wherein one of the periodic light pattern and resultant fringe pattern is a linear pattern, and the other

is an angular pattern.

An independent aspect of the present invention provides
opto-electronic rotary encoder apparatus for measuring
5 relative angular displacement having a scale defined by a
series of spaced apart lines, and a readhead lying in
register with the scale, the scale and readhead being
relatively movable in the direction of spacing of the
lines; the readhead comprising:

10 means for illuminating the scale whereby light passed
on by the scale forms a periodic light pattern;

an analyser grating for interacting with said periodic
light pattern to generate a resultant fringe pattern; and

a detector upon which said resultant fringe pattern is
15 incident, for generating a plurality of phase shifted
cyclically modulating signals upon said relative movement,
comprising:

a plurality of sets of photosensitive elements spaced
apart in the direction of spacing of said resultant
20 fringes, elements of different sets being interleaved in a
repeating pattern, and all elements of a given set being
electrically connected in common, wherein adjacent elements
are separated by a distance not equal to the fringe pitch
of said resultant fringes.

25 Embodiments of the invention will now be described, by way
of example, and with reference to the accompanying drawings
in which:

Fig 1 is a schematic elevation of a rotary encoder in
30 accordance with the present invention;

Fig 2 is a side view on II-II in Fig 1;

Figs 3a-c are signal diagrams illustrating the
generation of resultant fringes;

Fig 4 is a vector diagram;

35 Fig 5 is an elevation of the detector array in the
readhead of Fig 2;

Figs 6a-c illustrate the effect of code wheel
eccentricity;

Fig 7 is a graph showing phase error due to eccentricity;

Fig 8 illustrates the interference fringe pattern generated in the readhead of Fig 2;

5 Fig 9 is an elevation of a part of a modified analyser grating; and

Fig 10 is an elevation of a detector array used with the analyser of Fig 9.

10 Referring now to Figs 1 and 2, an angular encoder for measuring relative angular displacement of two members includes a circular code wheel 10, mounted to one of the members in a manner permitting rotation about a central bearing 12, and a pair of opto-electronic readheads 14,
15 mounted to the other of the members. The code wheel 10 has, at its periphery, a rotary scale 20, made up of a series of alternately light-reflecting and non-reflecting lines 22; the lines 22 extend radially and are circumferentially spaced from each other. Alternatively,
20 the lines may be provided by a phase grating (known per se) type structure, etched into the surface of the code wheel 10 to generate a scale.

The readheads 14 each include a diffuse light source 30,
25 which generates a collimated beam that illuminates the scale 20 via an index grating 32. The index grating 32 comprises alternate light transmitting and opaque lines (not shown), whose angular pitch and circumferential spacing are identical to the portion of the lines 22 of the
30 scale 20 with which the window defined by the index grating 32 is in register. After passing through index grating 32, light is reflected from the scale 20 and, by virtue of its interaction with both index grating 32 and scale 20, a periodic light pattern in the form of interference fringes
35 is formed in an analyser plane AP. The angular of both the lines on the index grating 32 and the scale 20, together with the stand-off distance between grating 32, and scale 20 are chosen so that a corresponding optical mechanism to

the linear encoding mechanism shown in GB 1504691, applies. In accordance with this type of optical mechanism, the interference fringes formed in the analyser plane AP will have the same angular pitch as the lines of the index grating 32 and scale 20 (N.B. in an alternative optical mechanism shadow fringes may be formed).

Rotation of the code wheel 10 relative to the readhead 14 will cause rotation of the interference fringes generated in the analyser plane AP, and a corresponding cyclically varying modulation of the intensity of light incident upon any given point in the said plane. Observation of two or more phases of this light intensity modulation will enable the determination of both the direction and magnitude of angular displacement of the wheel 10. However, direct observation of this light intensity modulation is only possible with a photo voltaic transducer whose dimensions are less than or equal to one half of the width of an interference fringe. In the present example, the linear spacing between adjacent lines of the scale 22 at their outer radius is equal to 2 microns, and this is therefore also the maximum linear spacing between adjacent fringes of the corresponding interference fringe pattern generated in analyser plane AP. It is therefore not practicable or cost efficient to construct photodetectors of the requisite size in order to monitor directly the aforementioned light intensity modulation. To make the light intensity modulation manifest to a photo voltaic transducer whose dimensions are substantially larger than the pitch of the interference fringes, an analyser grating 40 is provided in the analyser plane AP.

The function of the analyser grating 40 will now be explained with reference to Figs 3a-c. Referring now to Fig 3a, the light intensity distribution of the interference fringes 50 with angle is illustrated in Fig 3a. It can be seen that the intensity distribution is substantially sinusoidal, and that the angular pitch of the

fringes is constant. The configuration of the analyser grating 40 is illustrated in juxtaposition with the fringes 50 in Fig 3b. It can be seen from Figs 3a and 3b that the angular pitch of the analyser grating 40 is constant, but
5 the juxtaposition of the grating 40 with the interference fringes 50 reveals that the angular pitch of the grating is fractionally larger than that of the fringes; the fringes having an angular spatial frequency of 12 peaks for the angular displacement of α' , while the lines of the analyser
10 grating 40 having an angular frequency of 11 lines per angular displacement α' . As a result, when the interference fringes 50 are incident upon the analyser grating 40, what is observed from the side of the grating 40 remote from the scale 20 is a resultant fringe 60. The
15 generation of the resultant fringe 60 may be explained in that at the central portion of the illustrated part of the analyser grating 40 the high intensity peaks of the interference fringe pattern lie in register with non-transmissive lines of the grating 40, and so comparatively
20 little of the incident light from the interference fringes 50 is transmitted by the analyser grating 40. Toward the periphery, the high intensity peaks lie increasingly in register with light transmissive lines of the grating 40, as a result of which, more light is transmitted by the
25 analyser grating 40. The generation of a resultant fringe 60 of this type may be likened to the generation of a beat frequency, or to a Vernier scale. For this reason, resultant fringe 60 may be referred to as a resultant Vernier fringe.

30

Rotational movement of the interference fringe pattern relative to the analyser grating 40 (upon rotation of the code wheel 10) by an angular displacement equal to one interference fringe pitch, will result in a corresponding
35 shift of the resultant Vernier fringe by one resultant fringe pitch. It is therefore valid to observe the light intensity modulation occurring downbeam of the analyser grating from the shift of the resultant Vernier fringe 60

as a method of determining the angular displacement of the code wheel, since the shift of the resultant Vernier fringes 60 has a one-to-one relationship with the shift of the interference fringes 50.

5

Movement of the resultant Vernier fringes is detected by a structured array 100 of the type shown in Fig 5, comprising a semiconductor substrate 102, upon which a series of photosensitive elements are formed. The elements 110 extend radially with respect to the code wheel, and are grouped into three sets 110A, 110B, 110C, with all elements of a given set being electrically connected in common. The elements 110 are interleaved in a repeating pattern 110A-110B-110C, and are angularly spaced such that consecutive like elements are separated by an angle $1/V$, equal to the pitch of a resultant Vernier fringe. As the resultant Vernier fringes move across the array, each set of elements 110 will generate a sinusoidally varying electrical output; the outputs of the three sets of elements 110A, 110B, 110C, having a phase relationship of 0° , 120° , and 240° respectively may then be combined in a known manner, to produce a pair of sinusoidally varying quadrature outputs, yielding the magnitude and direction of rotation of the code wheel.

25

The pitch of a resultant Vernier fringe generated by the interaction between an incident interference fringe pattern and an analyser grating can be calculated in advance by means of simple vector mathematics. Referring now to Fig 4, a vector I_f represents the number of fringes per unit angular displacement of the incident interference fringe pattern; the vector A_g indicates the number of lines per unit angular displacement of the analyser grating; and the vector V_f denotes the number of resultant Vernier fringes per unit angular displacement which will be generated as a result of interaction between the incident interference fringes and the lines of the analyser grating. The sum of these three vectors must be equal to zero. Thus, for

35

example, if the incident interference fringe pattern has 250 fringes per unit of angular displacement, and the analyser grating has 249 lines per unit of angular displacement, there will be only 1 resultant Vernier fringe per unit of angular displacement. Thus it can be seen that the mathematics correspond to the calculation of the generation of a beat frequency between two interacting signals.

The pitch of the interference fringes, the pitch of the lines on the analyser grating and the pitch of the resultant Vernier fringes are $1/I_f$, $1/A_g$, $1/V_f$ respectively, and are angles. A further way to describe pitch in an angular encoder is in terms of circumferential spacing between adjacent lines or fringes, and this is given by the expression

$$2\pi \frac{R}{N}$$

where

R is the radius (measured from the point from which the lines or fringes extend radially) at which the lines or fringes are being viewed; and

N is the number of lines or fringes per revolution.

The circumferential spacing is a significant parameter because although the apparatus described thus far has a code wheel 10 whose scale 20 is mounted with perfect concentricity, in practice it is likely that the mounting of the code wheel 10 will be eccentric. The effect of such an eccentric mounting is a change in the circumferential spacing of the scale lines with rotation of the code wheel, when viewed from the readhead. Referring now to Fig 6a, the position of the optical centre O of the code wheel 10 (i.e. the point from which all the scale lines extend radially) is illustrated relative to the mechanical centre

M about which the code wheel 10 rotates. The eccentricity of the scale 20 is equal to the distance between the two points and is designated as e . Referring to Figs 6b, the readhead 14 is mounted relative to the code wheel 10 so that at a first angular displacement of the code wheel 10 the circumferential spacing of the part of the scale with which the readhead is in register is

$$2\pi \frac{r}{N}$$

where

10

r is the mean scale radius.

Referring to Fig 6c a 180° rotation of the code wheel 10 from this angular displacement will result in a change in the circumferential spacing (when taking into account the doubling effect of reflection) of the scale which lies in register with the readhead to:

$$2\pi \frac{(r-2e)}{N}$$

This change in the circumferential spacing of the scale 20 will cause a corresponding change in the circumferential spacing of the interference fringes incident upon the analyser grating, and consequently, a change in the circumferential spacing of the resultant Vernier fringes incident upon the photosensitive array 100. Because the circumferential spacing between consecutive like elements 110 of the array 100 is chosen to match the circumferential spacing of the resultant Vernier fringes, a change in the circumferential spacing of the resultant Vernier fringes from that selected for the elements 110 of the array 100 will give rise to a phase error in the electrical outputs of the array 100. If there are n photosensitive elements 110 in each set 110A,B,C of elements, and w is the

circumferential distance (see Fig 5) across the array 100, then the required circumferential spacing of the resultant Vernier fringes is:

$$\frac{w}{n}$$

5 using the vector analysis described above it can be shown that the new circumferential spacing q of the resultant Vernier fringes following the change in circumferential spacing of the scale is equal to

$$q = \frac{1}{\frac{N}{2n(R-2e)} - \frac{N}{2nR} + \frac{n}{w}}$$

10 The percentage phase error x arising from this change in circumferential spacing of 1 resultant Vernier fringe is

$$x = \left| \frac{w/n - q}{w/n} \right| \times 100$$

Summing for all fringes across the array, the accumulative error A is

$$A = (x + 2x + 3x + 4x + \dots + nx) / n$$

$$A = (n+1)x/2$$

15

It can be seen that for a given value of e both the absolute and percentage change in circumferential spacing of resultant Vernier fringes is smaller with increasing n . Thus, the greater the number of resultant Vernier fringes
20 (i.e. the smaller the circumferential spacing of the

resultant fringes), the lower the phase error. Fig 7 is a graphical illustration of the change in phase error with increasing number of resultant Vernier fringes, for a $10\mu\text{m}$ value of eccentricity and a scale of mean radius of 35.5mm having 55800 lines per rev.

Qualitatively this phenomenon may be understood in that small pitch resultant Vernier fringes are produced when the circumferential spacings of the interference fringes (and thus the scale) and analyser grating differ by a relatively large amount. The larger this difference is, the smaller the effect proportionally of a change in the circumferential spacing of the scale (and thus the interference fringes) due to eccentricity.

Referring now to Fig 8, the interference fringes incident upon the window 200 defining the extent of the analyser grating are illustrated.

We have appreciated that because the geometry of the analyser grating 40 with which the inference fringes interact determines the size of the resultant Vernier fringes, it is possible to configure the analyser grating 40 to obtain any pitch and/or geometry of resultant fringes from any given incident fringes (i.e. in the examples described herein, interference fringes). For example, a parallel, or "linear" resultant Vernier fringe pattern may be generated from angular radially extending fringe pattern or vice versa.

To obtain n parallel resultant Vernier fringes across the total width w of the analyser grating 40, the configuration of the analyser grating 40 may be determined in the following way:

The linear pitch of the 1st interference fringe from the 0th fringe (0th fringe extending substantially perpendicular to the window 200 defining the boundaries of

the analyser grating 40) at its inner radius within window 200 is P_i .

5 The number of lines per unit displacement (i.e. the spatial frequency) of lines at this pitch is thus given by $1/P_i$.

The required spatial frequency of resultant Vernier fringes is n fringes across an analyser window 200 of width w , i.e.

10 n/w .

Referring to Fig 9, the requisite linear pitch between the 0th and 1st line of the analyser grating at the inner radius of the analyser grating window 200 required to
15 generate a resultant Vernier fringe of width W/N is A_i , corresponding to a spatial frequency of $1/A_i$.

Using the vector analysis described above,

20 $1/A_i = 1/P_i - n/w$

rearranging

$A_i = wP_i / (w - nP_i)$

25

In order that the resultant Vernier fringes are made to extend parallel to each other, the pitch A_o between the 1st and 0th line of the analyser grating at its outer radius
30 within window 200 must be such that it will also interact with the interference fringe to produce a resultant Vernier fringe of pitch w/n . The same calculation must therefore be repeated in respect of the 1st and 0th interference
fringe to generate a value A_o of pitch at the outer radius
35 of 1st and 0th lines of the analyser grating.

Thus,

$$A_o = wP_o / (w - nP_o)$$

Where P_o is the pitch between the 0th and 1st fringes at the outer radius.

5

These calculations are then reiterated in respect of all further lines of the analyser grating, and the entire grating may then be generated by mirroring the resulting configuration about an axis of symmetry defined by the 0th line.

A suitably structured photodetector array 400, configured to generate three phase-shifted cyclically modulating electrical signals corresponding to the light intensity modulation of the linear resultant Vernier fringes upon rotation of the code wheel 10 is illustrated in Fig 10. As previously the detector array 400 comprises a semi-conductor substrate 402, having provided thereon a plurality of elongate substantially parallel light sensitive elements 410, grouped into three sets 410A, 410B, 410C, with all elements of a given set being connected electrically in common, and with the elements being interleaved in a repeating pattern 410A-410B-410C.

25

The configuration of a modified or "distorted" analyser grating to generate what in this specific example are parallel resultant Vernier fringes is advantageous because it enables a single design of photodetector array to be made for both linear and angular encoders. However, an independent advantage is that, even in the case of an angularly structured photodetector array, changes in e.g. pitch or configuration of the index grating or scale may be accommodated without modifying the structure of the array; this greatly reduces the cost of modifying the encoder, since a large part of the design cost involves the design of the photodetector array.

35

CLAIMS

1. Opto-electronic encoder apparatus for measuring relative movement having a scale defined by a series of spaced apart lines, and a readhead lying in register with the scale, the scale and readhead being relatively movable in the direction of spacing of the lines; the readhead comprising:
 - means for illuminating the scale whereby light passed on by the scale forms a periodic light pattern;
 - an analyser grating for interacting with said periodic light pattern to generate a resultant fringe pattern; and
 - a detector upon which said resultant fringe pattern is incident, for generating a plurality of phase shifted cyclically modulating signals upon said relative movement;wherein one of the periodic light pattern and resultant fringe pattern is a linear pattern, and the other is an angular pattern.
2. Apparatus according to claim 1, wherein said scale is a rotary scale.
3. Apparatus according to claim 1, wherein said scale is a linear scale.
4. Apparatus according to any one of the preceding claims, wherein said periodic light pattern is provided by interference fringes.
5. Apparatus according to claim 4, wherein said readhead includes a coherent light source for illuminating the scale.
6. Apparatus according to claim 4, wherein said readhead includes a diffuse light source and an index grating for illuminating the scale.
7. Apparatus according to any one of the preceding claims

wherein said detector comprises a plurality of sets of photosensitive elements spaced apart in the direction of spacing of said resultant fringes, elements of different sets being interleaved in a repeating pattern, and all
5 elements of a given set being electrically connected in common, wherein adjacent elements are separated by a distance not equal to the fringe pitch of said resultant fringes.

10 8. Opto-electronic rotary encoder apparatus for measuring relative angular displacement having a scale defined by a series of spaced apart lines, and a readhead lying in register with the scale, the scale and readhead being relatively movable in the direction of spacing of the
15 lines; the readhead comprising:

means for illuminating the scale whereby light passed on by the scale forms a periodic light pattern;

an analyser grating for interacting with said periodic light pattern to generate a resultant fringe pattern; and

20 a detector upon which said resultant fringe pattern is incident, for generating a plurality of phase shifted cyclically modulating signals upon said relative movement, comprising:

25 a plurality of sets of photosensitive elements spaced apart in the direction of spacing of said resultant fringes, elements of different sets being interleaved in a repeating pattern, and all elements of a given set being electrically connected in common, wherein adjacent elements are separated by a distance not equal to the fringe pitch
30 of said resultant fringes.

9. Apparatus according to claim 8, wherein said resultant fringes are linear fringes.

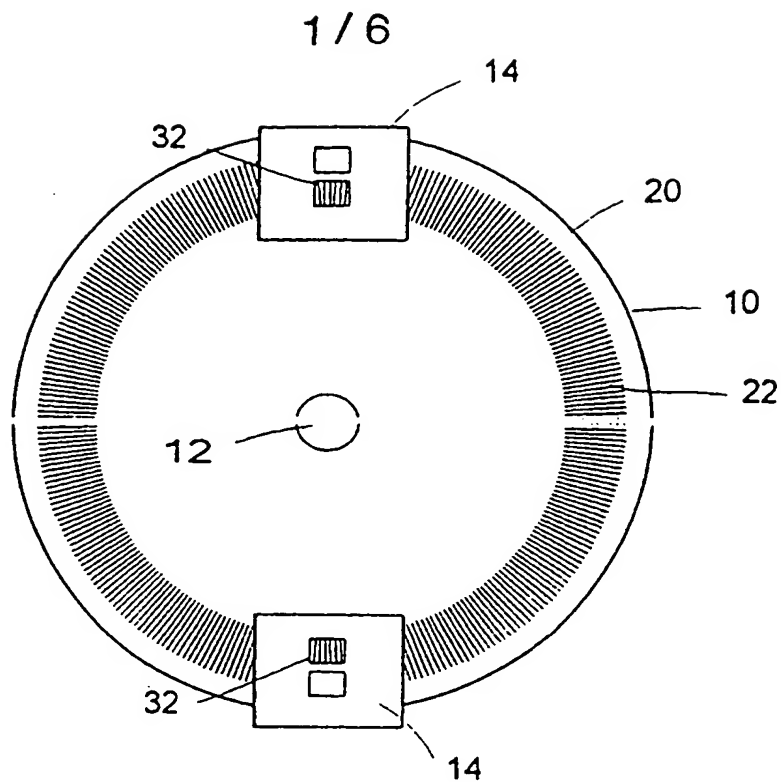


Fig.1

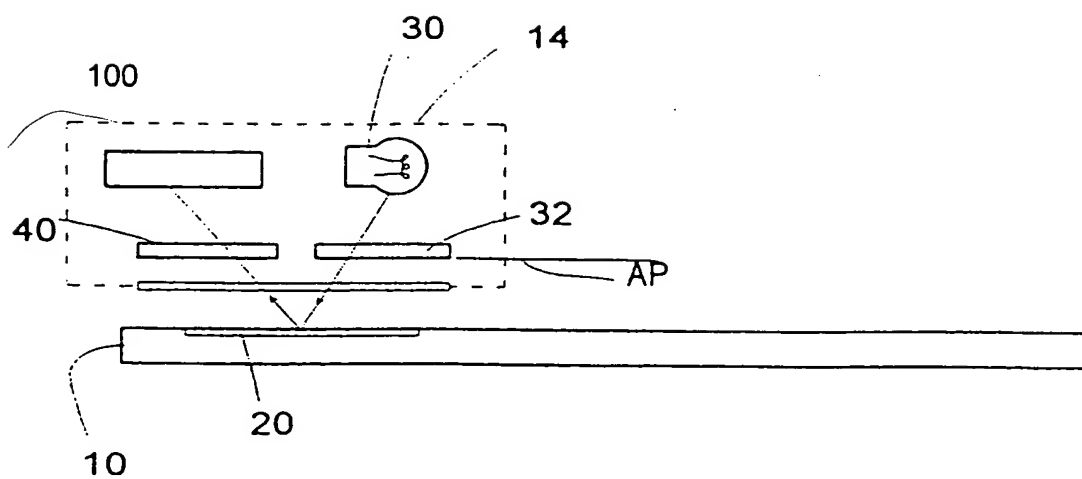


Fig.2

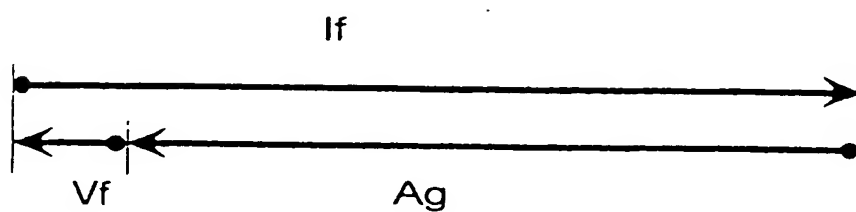
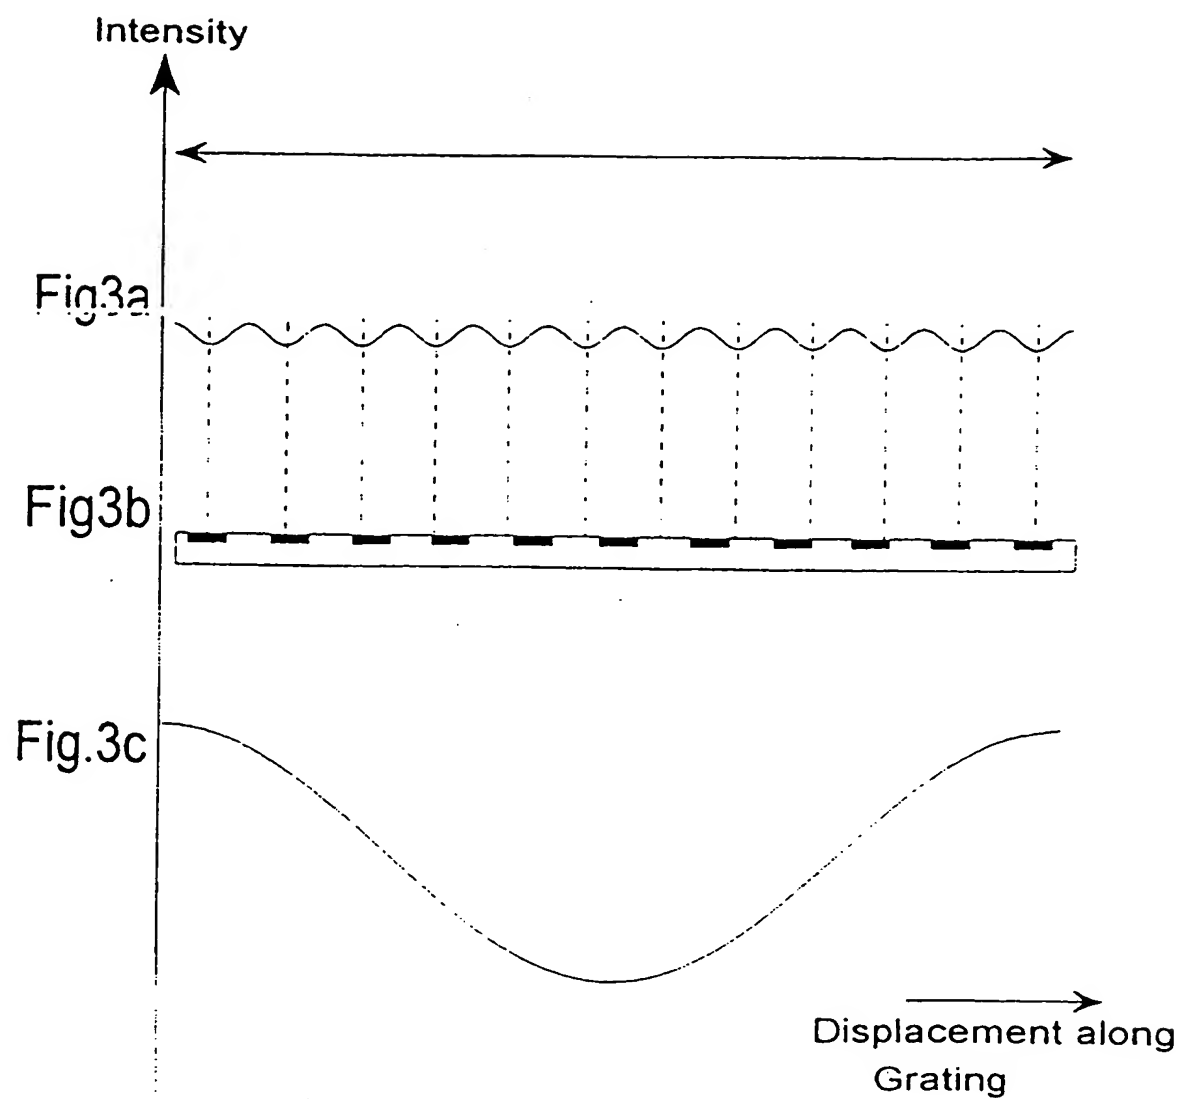


Fig.4

3 / 6

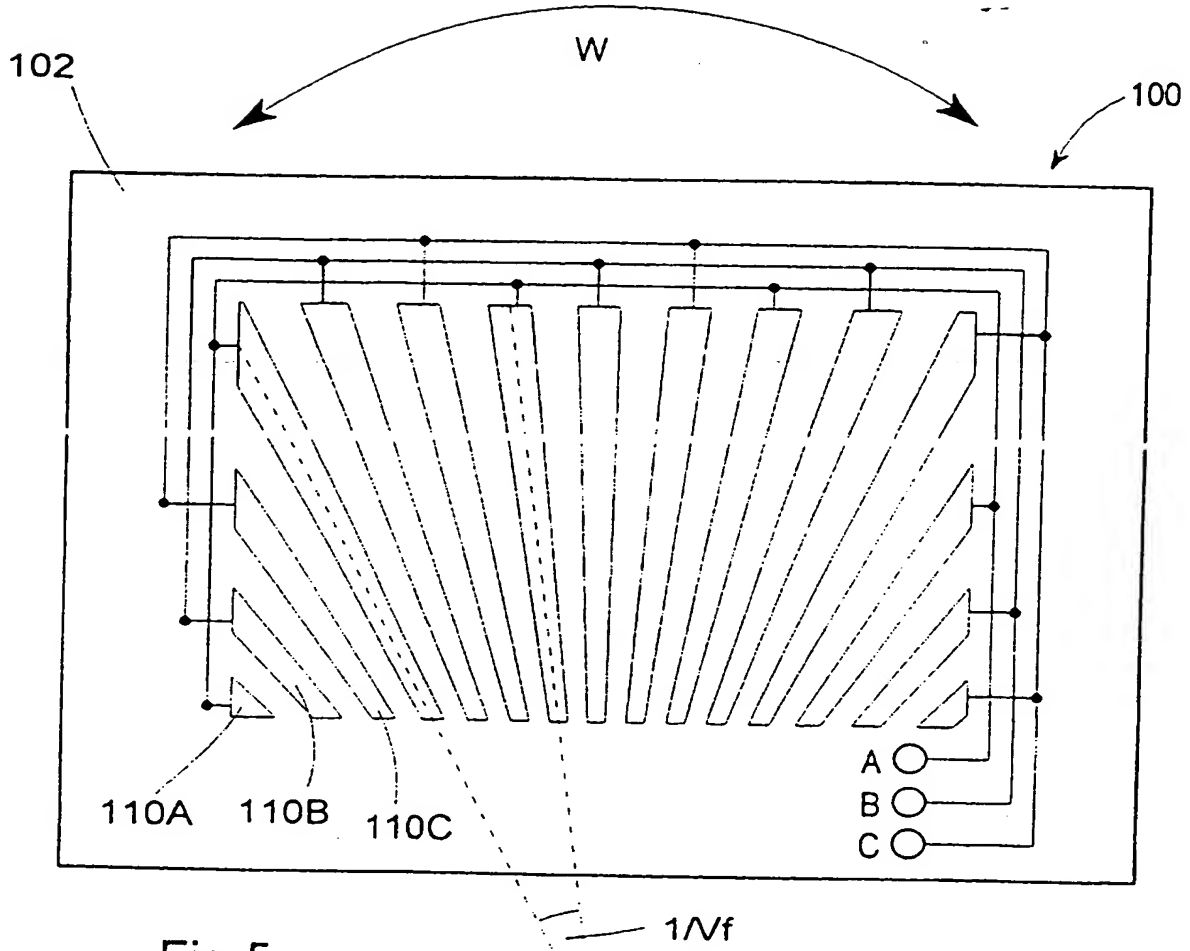


Fig.5

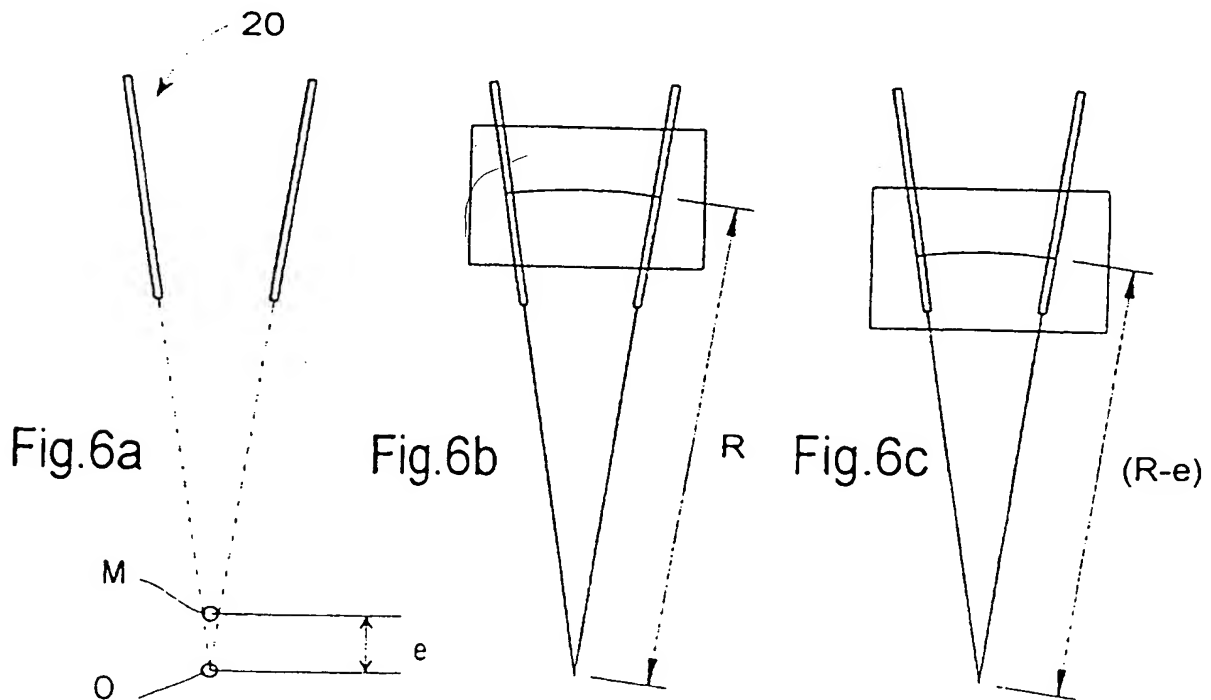



Fig.6a

Fig.6b

Fig.6c

Fig.7.

% ERROR DUE TO ECCENTRICITY (10 MICRONS)

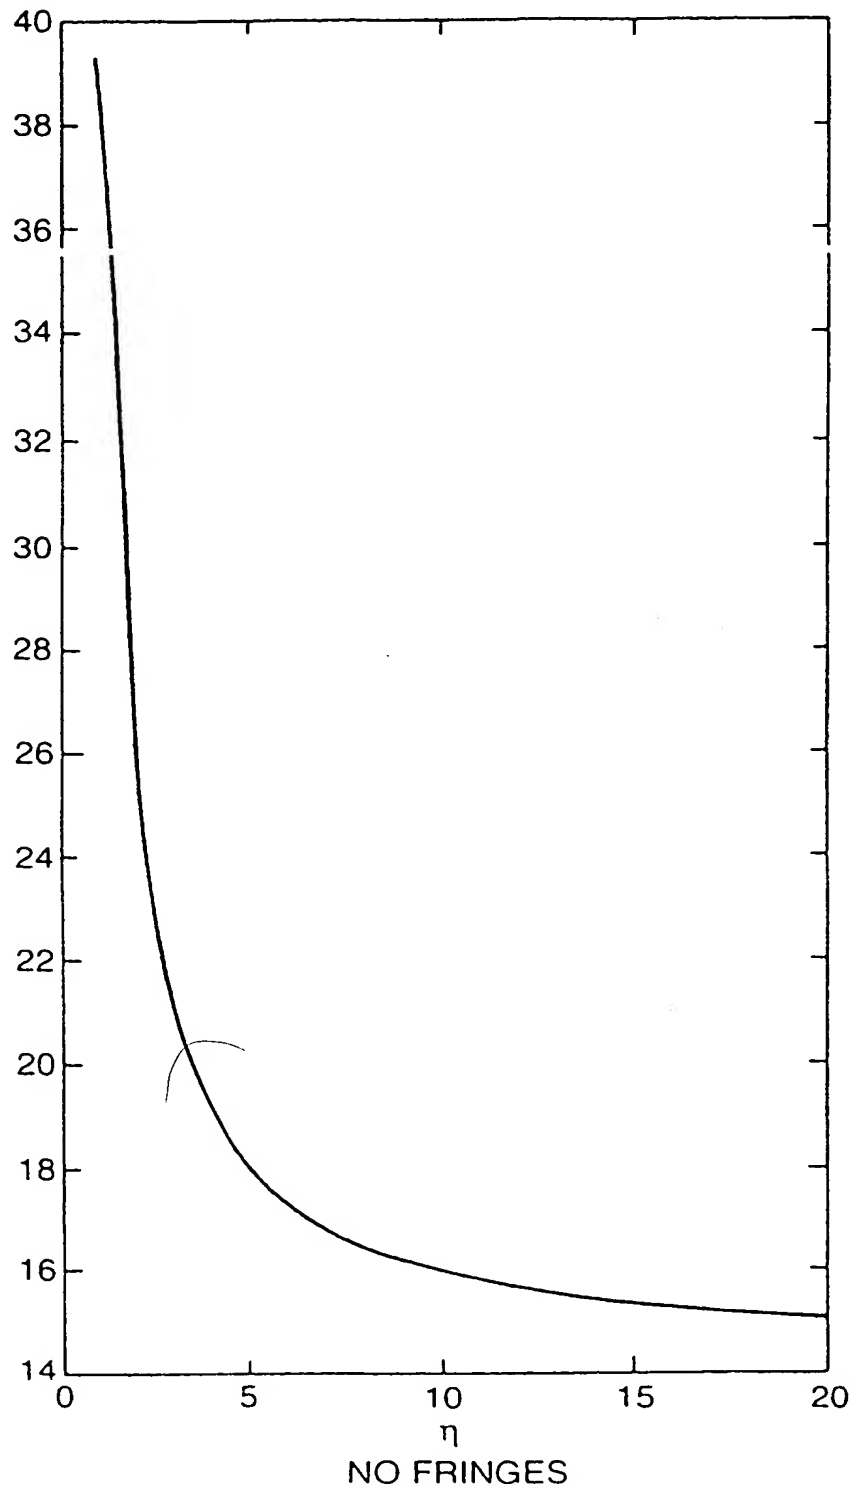

SUBSTITUTE SHEET (RULE 26)

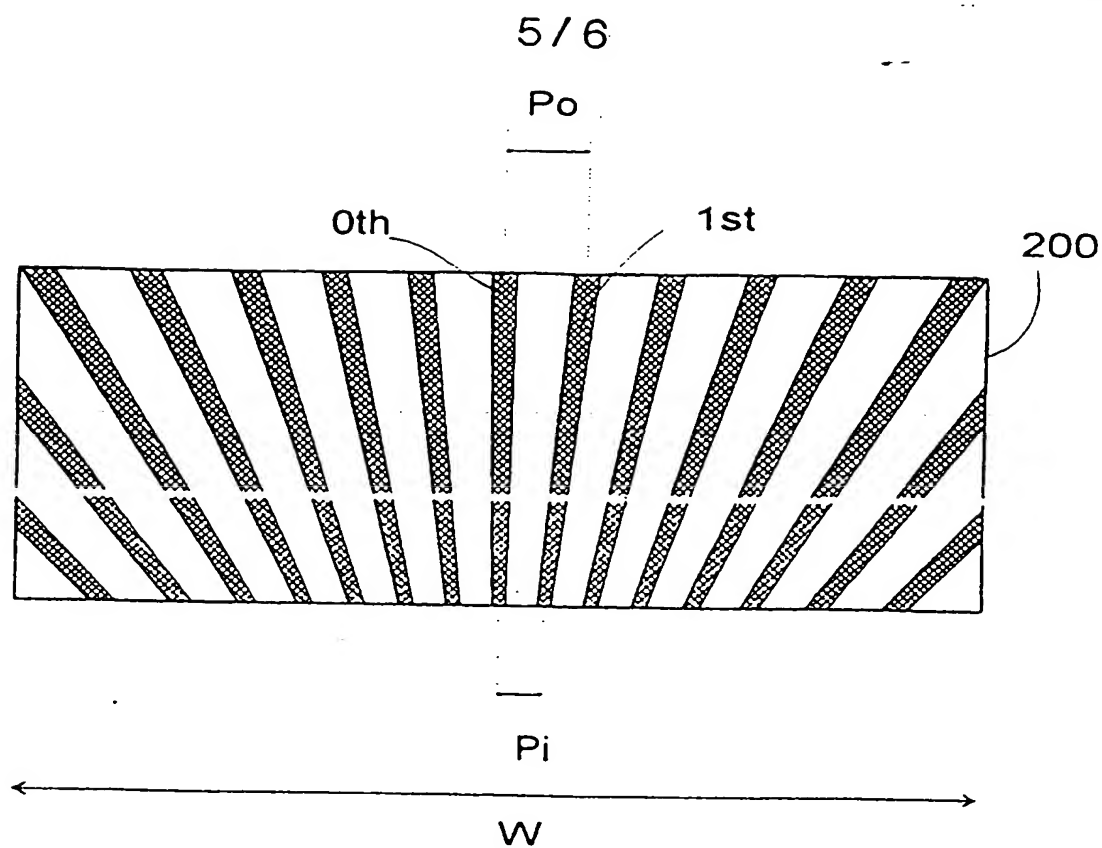


Fig.8

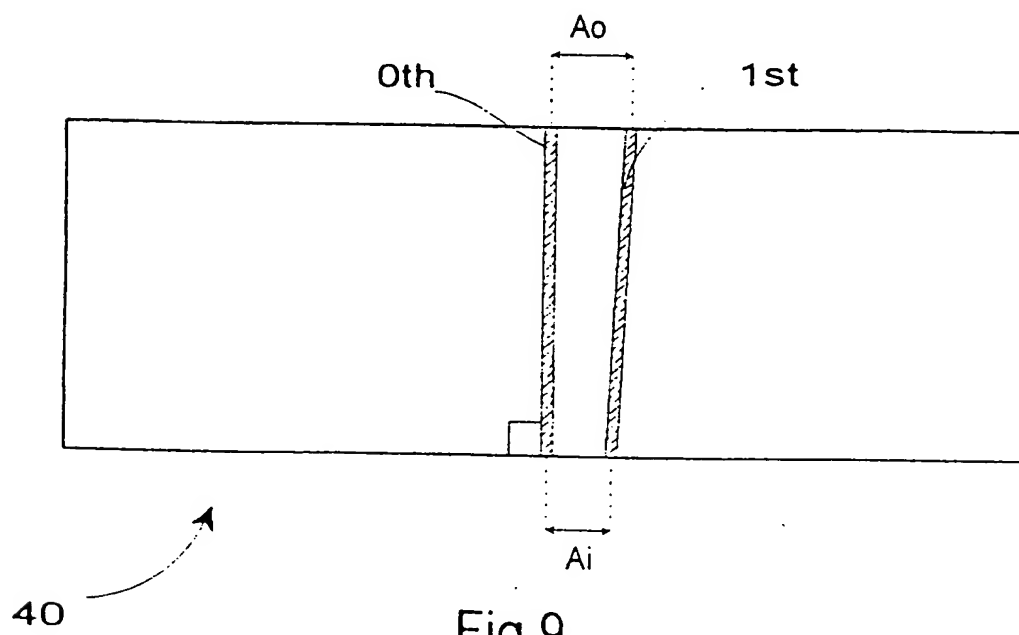


Fig.9

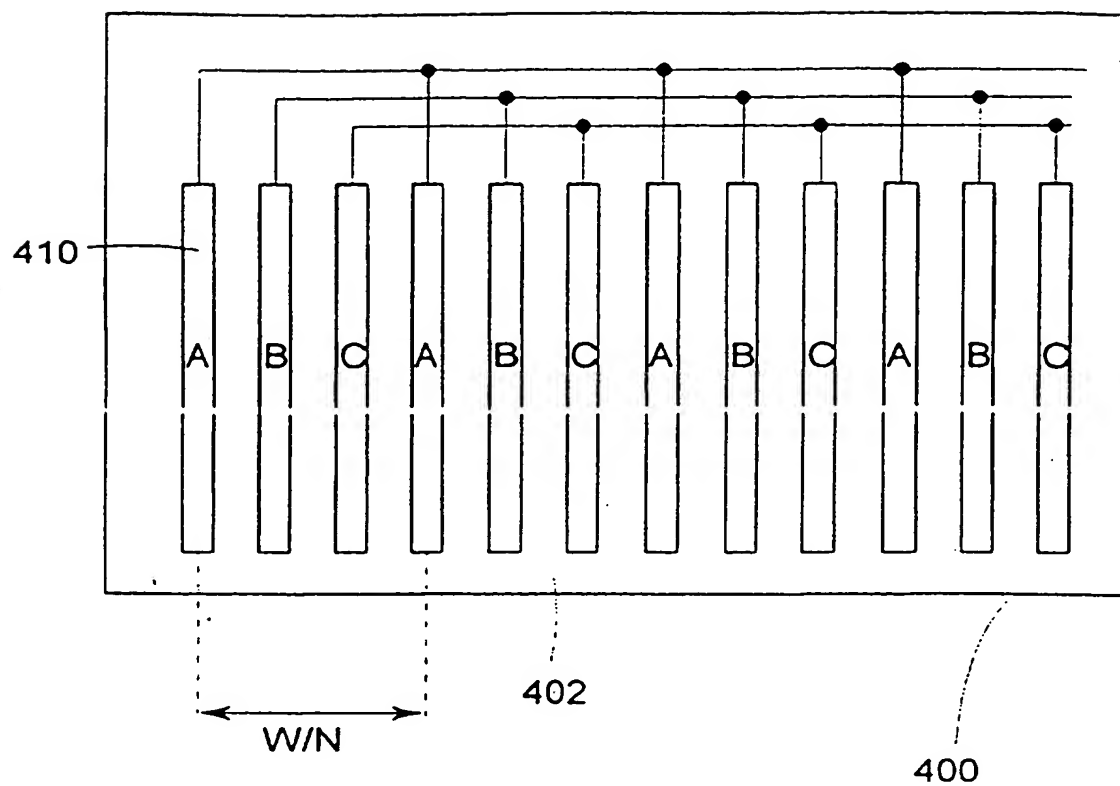


Fig.10

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/GB 96/02699A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01D5/34 G01D5/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 543 513 A (RENISHAW TRANSDUCER SYST) 26 May 1993 see the whole document ---	1
A	GB 1 220 094 A (CONTRAVES AG) 20 January 1971 see the whole document -----	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

5 February 1997

Date of mailing of the international search report

10.04.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl.
Fax (+ 31-70) 340-3016

Authorized officer

HOEKSTRA, F

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 96/ 02699

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. claims 1-7: use of a modified or "distorted" analyser grating to generate linear resultant fringes from an angular periodic light pattern
2. claims 8,9: using a plurality of interleaved photosensitive element sets in connection with an angular encoder

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-7

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 96/02699

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0543513 A	26-05-93	JP 5248895 A	28-09-93
		US 5302820 A	12-04-94

GB 1220094 A	20-01-71	CH 466593 A	
		DE 1798368 A	08-07-71
		FR 1567200 A	16-05-68
		GB 1220095 A	20-01-71
		NL 6801505 A,B	26-08-68
		SE 330780 B	30-11-70
		US 3553469 A	05-01-71
